

**MOOER**

# ShimVerb

Digital Reverb Pedal

## Owner's Manual

### Precautions

PLEASE READ CAREFULLY BEFORE PROCEEDING

#### Power Supply

Please connect the designated AC adapter to an AC outlet of the correct voltage. Please be sure to use only an AC adapter which supplies 9V (+/-10%) DC, center minus. The maximum working voltage shall not exceed 12V, otherwise may be dangerous equipment damage, fire or other problems. Unplug the AC power adapter when not using or during electrical storms.

#### Connections

Always turn off the power of this and all other equipment before connecting or disconnecting, this will help prevent malfunction and / or damage to other devices. Also make sure to disconnect all connection cables and the power cord before moving this unit.

#### Handling

Do not apply excessive force to the switches or controls. Do not let paper, metallic, or other objects into this unit. Take care not to drop the unit, and do not subject it to shock or excessive pressure.

#### Cleaning

Clean only with a soft, dry cloth. If necessary, slightly moisten the cloth. Do not use abrasive cleanser, cleaning alcohol, paint thinners, wax, solvents, cleaning fluids, or chemical-impregnated wiping cloths.

#### Interference with other electrical devices

Radios and televisions placed nearby may experience reception interference. Operate this unit at a suitable distance from radios and televisions.

#### Location

To avoid deformation, discoloration, or other serious damage, do not expose this unit to the following conditions:

- Direct sunlight
- Heat sources
- Magnetic fields
- Extreme temperature or humidity
- Excessive dusty or dirty location
- High humidity or moisture
- Strong vibrations or shocks


### Main Features

- 3 Reverb Modes: Room, Spring, Shimmer
- Full metal shell
- Very small and exquisite
- True bypass
- DC 9V Adapter power supply

### Effects Explanation

- Room:** Different sized true acoustics reverb, from room to hall.  
**Spring:** Simulates a classic spring reverberation, vintage 60's Surfing sound.  
**Shimmer:** Add rich overtone into the reverb sound, spacy, smooth and shining, very popular in Post Rock music.

### Panel Instruction

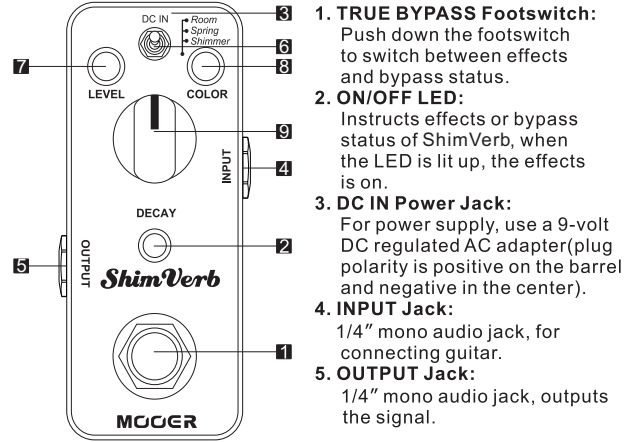

- 6. Mode Switch:** Switch between Room mode, Spring mode and Shimmer mode.  
**7. LEVEL Knob:** Adjust the level of the reverb sound.  
**8. COLOR Knob:** Adjust the tone of the reverb sound in Room mode; Adjust the volume of particular spring effects in Spring mode; Adjust the brightness of overtone in Shimmer mode.  
**9. DECAY Knob:** Adjust the decay time of the reverb sound.

### Specification

- Reverb Modes:** 3 (Room, Spring, Shimmer)  
**Input:** 1/4" monaural jack (impedance: 470k Ohms)  
**Output:** 1/4" monaural jack (impedance: 100 Ohms)  
**Power Requirements:** AC adapter 9V DC (center minus plug)  
**Current Draw:** 128 mA  
**Dimensions:** 93.5mm (D) x 42mm (W) x 52mm (H)  
**Weight:** 170g  
**Accessories:** Owner's Manual

\* Disclaimer: Any specification's update won't be amended in this manual.