

# K2

Precision Variable Pattern Dual 1" Condenser Valve Microphone

**RØDE**  
MICROPHONES




## Features

- Large capsule with gold sputtered diaphragm and internal shock mounting
- Ultra low noise
- Wide dynamic range
- Class 'A' valve circuitry
- Hand-selected and graded 6922 twin-triode valve
- Dedicated Power Supply
- High strength welded and heat-treated steel mesh head
- Durable satin nickel finish
- Continuously variable polar patterns. From omni, through cardioid to figure 8, controlled at the power supply.
- Designed and manufactured in Australia
- Full 10 year warranty\*


## Specifications

Acoustic Principle	Pressure, Pressure gradient	Directional Pattern	Switchable Omnidirectional / Cardioid / Figure-8 in nine steps
Frequency Range	20 Hz-20 kHz	Sensitivity	-37dB re 1V/Pa (14mV @ 94dB SPL) +/-2dB
Output Impedence	200Ω	Dimensions	Length - 201mm (7.9133") Diameter - 65mm (2.5590")
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)	Shipping Weight	6.82kg
Net Weight	1440g		

## Polar Pattern

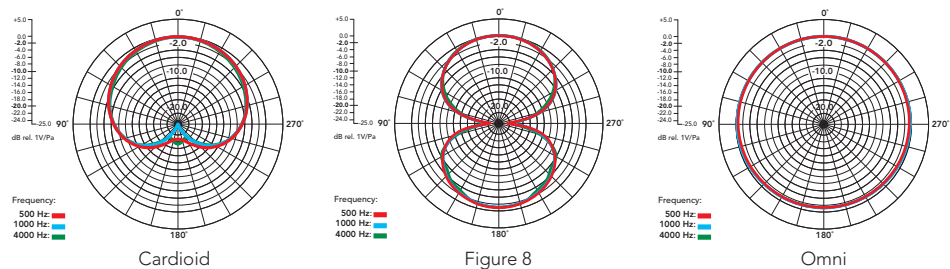

## Frequency Response

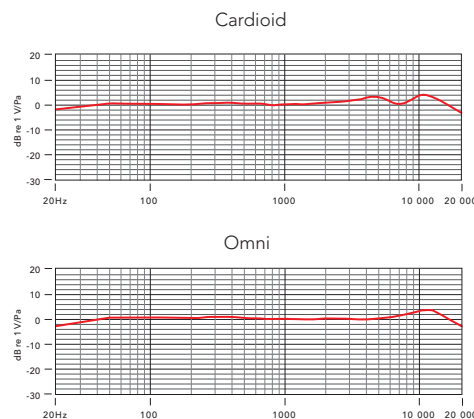

## Included Accessories

- SM2 shock mount
- RC2 case
- Transformer & high quality XLR lead



[www.rodemic.com](http://www.rodemic.com)



\*After online registration

Australia  
107 Carnarvon st, Silverwater NSW 2128 Australia  
Ph: +61 2 9648 5855      Fx: +61 2 9648 2455

USA  
PO Box 4189 Santa Barbara CA 93140 USA  
Ph: +1 805 566 7777      Fx: +1 805 566 0071