

SIRIUS HRI 440 W

SIRIUS HRI



Areas of application

- Concert Lighting
- Club & Disco
- Stage & Theatre
- Studio, TV, & Film
- Architecture & Architainment

Product features and benefits

- Lightweight and compact reflector lamps with optimized ECG
- High luminance through very short arc and high pressure
- Optimized burner design allows any burning position
- Stable light output over the entire lifetime
- Stable light output over the entire lifetime
- Easy lamp replacement
- Easy lamp replacement



Product datasheet

Technical data

General Product Information

Product number (Americas)	54626
Product name (Americas)	SIRIUS HRI 440W 2/CS 1/SKU
Family brand	SIRIUS HRI
Category	CORE
Global order reference	SIRIUS HRI 440 W


Electrical Data

Nominal wattage	440 W
Nominal voltage	83 V
Ignition voltage	2.5 kVp
Nominal current	5.3 A

Photometric Data

Nominal luminous flux	22000 lm
Color temperature	7000 K
Color rendering index Ra	80
Aperature window (max)	8.0 mm
Working distance	41 mm

Physical Attributes & Dimensions

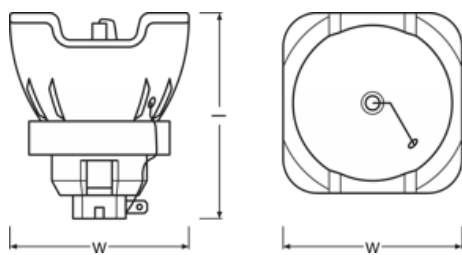

Electrode gap (cold)	1.3 mm
Lamp base	-
Diameter	58.0 mm
Diameter	58.0 mm
Length	71.0 mm
Product weight	100.00 g

Product datasheet

Operating Conditions

Burning position	Any
Cooling	Forced

Lifetime Data

Nominal lifetime	1500 hr
------------------	---------

Environmental & Regulatory Information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Primary article identifier	4052899259096 4052899222212 4052899587892 4052899570566 4052899553644
Declaration no. in SCIP database	No declarable substances contained
Candidate list substance 1	No declarable substances contained

Product datasheet

Safety advice

Because of their high luminance, UV radiation and high internal pressure during operation, SIRIUS HRI lamps may only be operated in enclosed lamp casings specially constructed for the purpose. Appropriate filters must ensure that UV radiation is reduced to an acceptable level. Mercury is released if the lamp breaks. Special safety precautions must be taken. Information on safety and handling is available on request or can be found in the leaflet included with the lamp or in the operating instructions.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899259096	SIRIUS HRI 440 W	Folding carton box 1	87 mm x 87 mm x 103 mm	0.78 dm ³	148.00 g
4052899259102	SIRIUS HRI 440 W	Shipping carton box 2	186 mm x 96 mm x 115 mm	2.05 dm ³	342.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.